



FS Original

Single fired floor tiles



FS0



FS2



59

60

FS Original

Single fired floor tiles



FS1



FS Original

Single fired floor tiles

FS Nijar

FS-0




13 patterns

FS-1



10 patterns

FS-2

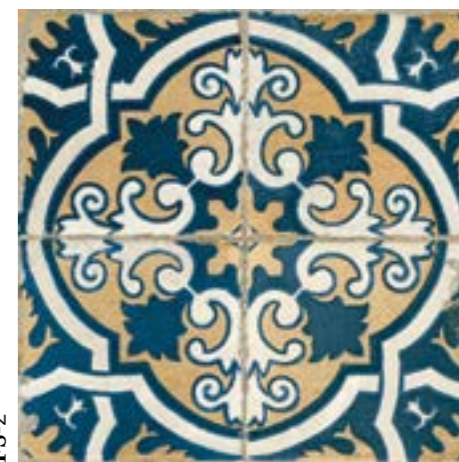

5 patterns

FS-3



8 patterns

FS-4




5 patterns

FS NIJAR




6 patterns

FS ORIGINAL



45 * 45 * 1,05 cm | 18 * 18"

NO RECTIFIED	NATURAL
	BN14
FS-0	13305
FS-1	12500
FS-2	12501
FS-3	12519
FS-4	12541
FS NIJAR	20402



Rodapie - Skirting (R. FS 0)
8 * 45 cm | 3 * 18" P8

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

joint	versatile	matt	different shades	shade variation	various graphics	various moulds

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo Essay	Características Features	Resultado Result
		0, 1, 2, 3, 4 nijar
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R9 R10
DIN 51097	Ángulo crítico (Pies descalzos) Critical angle (Wet loaded barefoot)	- A+B
BS-77976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test-PTV)	+36 Wet +36 Wet
UNE-ENV 12633	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 1 Class 2
AINSI A137.1	Coefficiente de Fricción Dinámico Dynamic Coefficient of Friction (DCOF)	- >0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4 -

EMBALAJE | PACKING

(Los pesos aquí reflejados pueden sufrir ligeras variaciones en función del lote de producción. Weights shown here may slightly vary depending on the production lot.)

Formato Sizes	Cajas Boxes			Pallet			Tamaño cm aprox.	Cont./20' 21500 kg.	Cont./20' 24000 kg.
	Piezas	m2/ sq.m	kg	Cajas	m2/ sq.m	kg			
cm									
45 * 45 * 1,05	5	1	23,1	66	66	1551	120 * 80 * 105	914,89	1021,28
inch	Units	ft2	lb	Boxes	ft2	lb	Sizes inch approx.	ft2	ft2
17 11/16 * 17 11/16 * 7/16	5	10,76	51	66	710,42	3419,96	47 1/4 * 31 1/2 * 41 5/16	9847,91	10993,02