



Wild JP 05 200x1200 / 8"x48" NAT RECT

JURUPA

Rediscover the allure of OAK, with an alternative approach: grouting, scratches and gnarls for a contemporary effect.

Jurupa comes in 5 colours, 3 sizes, Natural R9 finish for indoors, Grip R11 and Radiale R11 for outdoors, guaranteeing maximum coordinability within the collection.



FLOOR: Master JP 03 200x1200 / 8"x48" NAT RECT

WALL and TOP: NORR Grå RR 02 1200x2780 NAT

ISLAND TOP: JEWELS Statuario Venato JW 14 1620x3240 / 63¾"x127½" LUC



FLOOR: Camp **JP 04** 300x1200 / 12"x48" RD RECT EVO_2/E" \pm 20 mm
WALL: Camp **JP 04** 200x1200 / 8"x48" NAT RECT

COLORI

Colours | Farben | Couleurs | Colores | Цветов | 种颜色



Basic
JP 01



Cool
JP 02



Master
JP 03



Camp
JP 04



Wild
JP 05



FLOOR: Camp **JP 04** 200x1200 / 8"x48" NAT RECT
WALL and TUB: GLOCAL Absolute **GC 06** 1200x2780 / 48"x110" SP RECT
WALL SHOWER and TOP: Camp **JP 04** 200x1200 / 8"x48" NAT RECT



COLORI

Colours | Farben | Couleurs | Colores | Цветов | 种颜色

BASIC JP 01



Formati Nominali Nominal Sizes		Superficie Finish	Spessore mm Thickness mm
200x1200 / 8"x48"	NAT / GP RECT	9	
300x2400 / 12"x96"	NAT RECT	9	

Stucchi consigliati Recommended grouts	
KERAKOLL	43
MAPEI	112 Grigio Medio
LATICRETE	04 Sterling Silver



CAMP JP 04




Formati Nominali Nominal Sizes		Superficie Finish	Spessore mm Thickness mm
200x1200 / 8"x48"	NAT / GP RECT	9	
300x2400 / 12"x96"	NAT RECT	9	
600x600 / 24"x24"	RD RECT	20	
300x1200 / 12"x48"	RD RECT	20	
300x2400 / 12"x48"	RD RECT	20	

Stucchi consigliati Recommended grouts	
KERAKOLL	26
MAPEI	134 Seta
LATICRETE	78 Sterling Silver



COOL JP 02

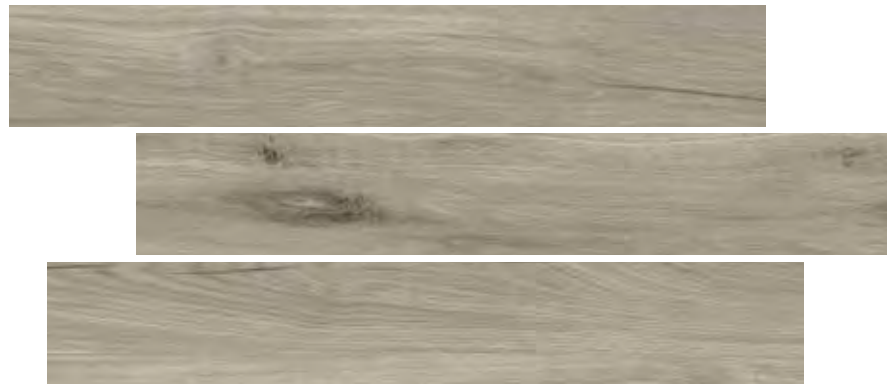


Formati Nominali Nominal Sizes		Superficie Finish	Spessore mm Thickness mm
200x1200 / 8"x48"	NAT / GP RECT	9	
300x2400 / 12"x96"	NAT RECT	9	
600x600 / 24"x24"	RD RECT	20	
300x1200 / 12"x48"	RD RECT	20	
300x2400 / 12"x48"	RD RECT	20	

Stucchi consigliati Recommended grouts	
KERAKOLL	45
MAPEI	111 Grigio Argento
LATICRETE	89 Smoke Grey



WILD JP 05

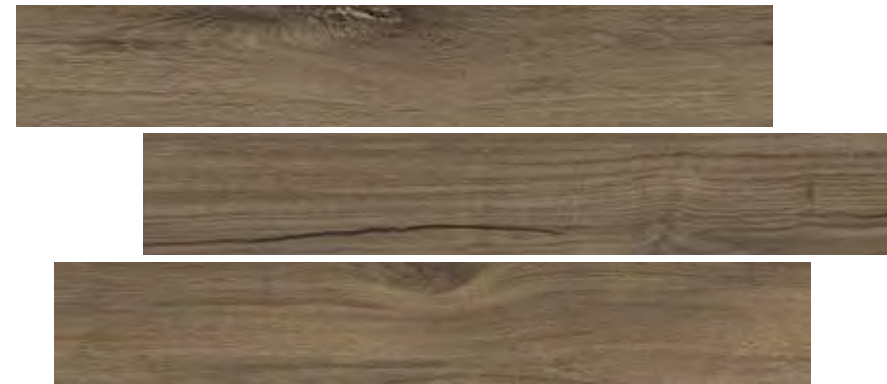

Formati Nominali Nominal Sizes		Superficie Finish	Spessore mm Thickness mm
200x1200 / 8"x48"	NAT / GP RECT	9	
300x2400 / 12"x96"	NAT RECT	9	

Stucchi consigliati Recommended grouts	
KERAKOLL	26
MAPEI	136 Fango
LATICRETE	45 Raven



MASTER JP 03



Formati Nominali Nominal Sizes		Superficie Finish	Spessore mm Thickness mm
200x1200 / 8"x48"	NAT / GP RECT	9	
300x2400 / 12"x96"	NAT RECT	9	
600x600 / 24"x24"	RD RECT	20	
300x1200 / 12"x48"	RD RECT	20	
300x2400 / 12"x48"	RD RECT	20	

Stucchi consigliati Recommended grouts	
KERAKOLL	30
MAPEI	113 Grigio Argento
LATICRETE	34 Sand Stone



NAT: Naturale | Natural | Natur/unpoliert | Naturelle | Natural | Натуральный | 天然
 GP: Grip
 RD: Radiale

RIASSUNTIVO FORMATI ED IMBALLI

Summary of sizes and packaging | Übersicht über Formate und Verpackungen | Récapitulatif formats et emballages
Sinóptico de formatos y embalajes | Краткая информация о форматах и упаковках | 规格和包装概述

Formati Nominali Nominal Sizes		200x1200 8"x48"	300x2400 12"x96"	9 mm
Tutti i formati sono rettificati. All sizes are rectified.				
Superficie Finish		NAT	GP	NAT
BASIC JP 01	V2	■	■	■
COOL JP 02	V2	■	■	■
MASTER JP 03	V2	■	■	■
CAMP JP 04	V2	■	■	■
WILD JP 05	V2	■	■	■
Peso lordo per scatola Gross weight per box		30,92	30,92	Please refer to page 562
Pezzi per scatola Pieces for box		6	6	
mq. scatola sqm. box		1,44	1,44	
Scatole / Full pallet boxes / Full pallet		32	32	
mq. pallet sqm. pallet		46,08	46,08	

Formati Nominali Nominal Sizes		300x1200 12"x48"	600x600 24"x24"	300x2400 12"x96"	20 mm
Tutti i formati sono rettificati. All sizes are rectified.					
Superficie Finish		RD	RD	RD	
BASIC JP 01	V2	-	-	-	
COOL JP 02	V2	■	■	■	
MASTER JP 03	V2	■	■	■	
CAMP JP 04	V2	■	■	■	
WILD JP 05	V2	-	-	-	
Peso lordo per scatola Gross weight per box		32,00	32,57	Please refer to page 562	
Pezzi per scatola Pieces for box		2	2		
mq. scatola sqm. box		0,72	0,72		
Scatole / Full pallet boxes / Full pallet		36	30		
mq. pallet sqm. pallet		25,92	21,60		

NAT: Naturale | Natural | Natur/unpoliert | Naturelle | Natural | Натуральный | 天然
GP: Grip
RD: Radiale

PEZZI SPECIALI

Special pieces | Sonderstücke | Pièces spéciales | Piezas especiales | специальные изделия | 特殊件

		Battiscopa*	Gradino A*
Pezzi speciali Special pieces		72x600 27"x24"	330x1200 131/2"x48"
Superficie Finish		NAT	NAT
BASIC JP 01		■	■
COOL JP 02		■	■
MASTER JP 03		■	■
CAMP JP 04		■	■
WILD JP 05		■	■
Pezzi per scatola Pieces for box		10	4

* Finitura a becco di civetta | One-round edge shaping | Ausführung mit Eckabrundung | Façonnage à bord rond | Acabado canto romo | Плитка с завалом | 鹰嘴边缘处理

DECORI

Decors | Dekore | Decors | Decoros | Декоры | 装饰砖

Leaf NAT
223x260 / 8¾"x10¼"



Pezzi per scatola
Pieces for box
Leaf 6

MY NOTES

.....

.....

.....

.....

.....

Maggiori informazioni
More information





CARATTERISTICHE TECNICHE

Technical specifications | Technische Eigenschaften | Caractéristiques techniques | Características técnicas | Технические характеристики | 技术特征

STANDARD EN 14411 - G

	CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ 技术特征	NORMA STANDARD NORM NORME NORMA ЗНАЧЕНИЯ 标准	VALORI PRESCRITTI DALLE NORME EN 14411 - G INTERNATIONAL STANDARDS EN 14411 - G INTERNATIONALE NORMWERTE EN 14411 - G VALEURS PREVUES PAR LES NORMES EN 14411 - G VALORES PREVISTOS POR LAS NORMAS EN 14411 - G ПРЕДУСМОТРЕННЫЕ СТАНДАРТОМ EN 14411-G EN 14411 - G标准规定值	*VALORE MEDIO MIRAGE MIRAGE AVERAGE VALUE MIRAGE MITTELWERT VALEURS MOYEN MIRAGE VALOR MEDIO MIRAGE СРЕДНЕЕ ЗНАЧЕНИЕ MIRAGE MIRAGE平均值		
				NAT	GP	RD 20mm
	CARATTERISTICHE DIMENSIONALI - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN DETERMINATION DES CARACTERISTIQUES DIMENSIONNELLES - CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征					
	LATI SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН - 侧边	EN ISO 10545-2	± 0,3% MAX (± 1,0 mm MAX)	CONFORME COMPLYING		
	SPESSORE THICKNESS - DICKE EPAISSEUR - ESPESOR ТОЛЩИНА - 厚度	EN ISO 10545-2	± 5,0% MAX (± 0,5 mm MAX)	CONFORME COMPLYING		
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS КОСОУГОЛЬНОСТЬ - 边角平直度	EN ISO 10545-2	± 0,3% MAX (± 0,8 mm MAX)	CONFORME COMPLYING		
	ORTOGONALITÀ RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРИВИЗНА СТОРОН - 直角度	EN ISO 10545-2	± 0,3% MAX (± 1,5 mm MAX)	CONFORME COMPLYING		
	PLANARITÀ SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度	EN ISO 10545-2	± 0,4% MAX (± 1,8 mm MAX)	CONFORME COMPLYING		
	ASSORBIMENTO D'ACQUA WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ - 吸水率	EN ISO 10545-3	≤ 0,5%	≤ 0,1%		
	RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE - BIEGEFESTIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (> 7,5 mm) R ≥ 35 N/mm².	±9 mm: S≥2.400N R≥48N/mm² ±20 mm: S≥12.500N R≥48N/mm²		
	RESISTENZA ALL'URTO IMPACT RESISTANCE - STOSSFESTIGKEIT RESISTANCE AUX CHOCS - RESISTENCIA A LOS GOLPES УДАРОСТОЙКОСТЬ - 抗冲击强度	EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE	> 0,48		
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE - ABRIEBFESTIGKEIT RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度	EN ISO 10545-6	≤ 175 mm³	< 150 mm³		
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL-EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFFICIENTE DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数	EN ISO 10545-8	-	α=6,6x10 ⁻⁶ °C ⁻¹		
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCS THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性	EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	RESISTENZA AL GELO FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ - 耐冻性	EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	RESISTENZA ALL'ATTACCO CHIMICO RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT RESISTANCE A L'ATTAQUE CHIMIQUE - RESISTENCIA QUÍMICA ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用	EN ISO 10545-13	B MIN.	A LA HA		
	RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性	EN ISO 10545-14	VALORE DICHIARATO DECLARED VALUE	5		
	CESSIONE DI PIOMBO E CADMIUM LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ - 铅和镉的排放	EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE	< AL LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT		
				NAT	GP	RD 20mm
			> 0,40	> 0,40	> 0,40	> 0,40
			Wet and Dry	≥ 0,42	≥ 0,55	≥ 0,55
			-	P2	P4	-
			-	R9	R11	R11
			-	A	A+B+C	A+B+C
			≥ CL1	CL1	CL3	-
			Wet and Dry	-	≥ 0,36	-
			Wet and Dry	-	≥ 0,36	-
	SCIVOLOSITÀ SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ - 防滑性					

Per i certificati specifici, contattare Mirage SpA - For specific certificates, please contact Mirage SpA - Für die speziellen Zertifikate wenden Sie sich bitte an Mirage SpA - Pour les certificats spécifiques, veuillez contacter Mirage SpA
Para los certificados específicos, contactar Mirage SpA - Для сертификатов обращайтесь в компанию Mirage SpA - 关于具体的证书, 请联系Mirage Spa公司