



Essence

Porcelain tiles

ESSENCE | ESSENCE ALMOND_19,5/R | ESSENCE ALMOND_15/R



ESSENCE | ESSENCE TAUPE_19,5/R ERTA SILVER_100/R ERTA SILVER DECOR_100/R



ESSENCE | ESSENCE TAUPE_19,5/R

Essence

Porcelain tiles



24 * 151,2 cm | 9 3/16 * 59 7/16 * 1/2"

RECTIFIED	NATURAL POLICOLOR BN93
MAPLE	-
ALMOND	22329
TAUPE	22330
NUT	-



19,5 * 121,5 * 1,05 cm | 7 13/16 * 45 13/16 * 7/16"

RECTIFIED	NATURAL POLICOLOR BN60	ANTISLIP POLICOLOR BN95
MAPLE	21799	-
ALMOND	21798	22328
TAUPE	21801	22325
NUT	21800	-




15 * 90 * 1,05 cm | 5 15/16 * 35 3/16 * 7/16"

RECTIFIED	NATURAL POLICOLOR BN1
MAPLE	21886
ALMOND	21885
TAUPE	21888
NUT	21887

Una pieza, un escalón.
One piece, one step.

NUEVO FORMATO | NEW FORMAT
30 * 121,5 cm | 11 13/16 * 47 13/16"

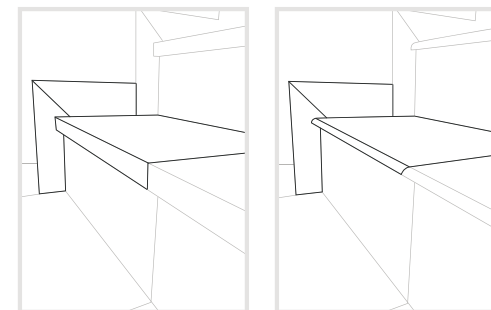

PIEZA COMPLEMENTARIA COMPLEMENTARY PIECE			
Rodapie - Skirting 7,5*45 cm 2 15/16 * 17 3/4" P29	Peldaño técnico - Technical stair - thread 30*121,5 cm 11 13/16 * 47 13/16" P75 A= 1,05 cm B= 3,15 cm A= 3/16" B= 1 1/4"	Peldaño romo - Rounded stair - thread 30*121,5 cm 7 11/16 * 47 13/16" P61	*S.K.I. *S.K.D. *Z.R.I. *Z.R.D.

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO ANTI-SLIP CHARACTERISTICS			
Ensayo Essay	Características Features	Resultado Result	
		NATURAL	ANTISLIP
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R9	R11
DIN 51097	Ángulo crítico (Pies descalzos) Critical angle (Wet loaded barefoot)	-	A+B
BS-7976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	+30-36 Wet	+36 Wet
UNE-ENV-12633	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 1	Class 3
ANSI A137.1	Coefficiente de Fricción Dinámico Dynamic Coefficient of Friction	> 0,42	> 0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4	

APLICACIONES APPLICATIONS				
Área Area	Revestimiento Wall		Pavimento Floor	
	NAT	ANTISLIP	NAT	ANTISLIP
Interior Internal	✓	✓	✓	✓
Exterior External	✓	✓	✓	✓
Comercial Commercial	✓	✓	-	✓
Ducha Shower	✓	✓	-	-

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS				EMBALAJE PACKING											
joint	frost proof	versatile	matte	Formato Sizes			Cajas Boxes			Pallet			Cont./20' 21500 kg.	Cont./20' 24000 kg.	
				cm	Piezas	m ² /sq.m	kg	Cajas	m ² /sq.m	kg	Tamaño cm aprox.	m ² /sq.m	m ² /sq.m		
				19,5 * 121,5 * 1,05	3	0,71	17,30	50	35,54	890,00	128 * 95 * 55	858,52	958,35		
				15 * 90 * 1,05	7	0,95	23,00	48	45,36	1119,00	100 * 100 * 75	871,53	972,87		
				inch	Units	ft ²	lb	Boxes	ft ²	lb	Sizes inch approx.	ft ²	ft ²		
				7 13/16 * 47 13/16 * 7/16	3	7,65	38,06	50	382,54	1958,00	50 3/8 * 37 3/8 * 21 5/8	9241,03	10315,57		
				5 15/16 * 35 3/16 * 7/16	7	10,17	50,60	48	488,25	2461,80	39 3/8 * 39 3/8 * 29 1/2	9381,04	10471,86		